

电动产床(99型)

Electric Parturition Bed (Model 99)



99型

该产品适用于产前检查、产妇分娩、难产手术及施行刮宫等妇科手术。床体升降、背板折转采用电动装置实现，安全可靠，操作简便。

This bed is designed for obstetric diagnosis, parturition, difficult labour, dilataion and curettage as well as for gynaecological operations. The bed can be raised or lowered electrically. It is reliable and can be adjusted easily.

主要规格 (Specifications)

长 (Length)	1900mm
宽 (Width)	600mm
台面最高 (Max Height)	990mm
台面最低 (Min Height)	750mm

主要技术参数 (Main Technical Parameters)

背板上折 (Back Section Raised from the Horizontal)	$\geq 40^\circ$
背板下折 (Back section Lowered from the Horizontal)	$\geq 10^\circ$
腿板下折 (Leg Section Lowered from the Horizontal)	$\geq 90^\circ$
电源 (Supply)	交流 (AC) 220V $\pm 10\%$, 50Hz
包装体积 (Volume)	155 \times 89 \times 100cm

电动产床(99A型)

Electric Parturition Bed (Model 99A)

99A型电动产床是我公司根据市场需要，吸收和借鉴国外先进技术制造的，供妇产科分娩、妇科手术、诊断及检查，具有包括紧急剖腹产在内的多种医疗功能。

该床的升降、前后倾由微型触摸控制器操纵，使用方便、灵活（另可配脚踏开关），动力系统关键部分采用线性电机，噪音低、性能稳定、使用环境好，背板采用手动气压弹簧结构，角度可调，配有隐藏式活动辅助台面，方便医生和助产人员操作。所有外罩、台面板、污物盆，均为不锈钢制作，外表美观，易于清洁。

Model 99A has various functions including babybirth operation, gynecology surgical operation, patient examining, checking and caesarean operation.


The Whole rising, descent, forward and backward of the inclination are manipulated by a footboard controller, The electric motor has fetures of low noise and stability. Barometric pressure spring is used in back board. The auxilliary set by hand manipulates can be concealed. The plank, basin of all outer shells are made of stainless steel. And it also can be easily cleaned.

主要规格 (Specifications)

长度 (Length)	1330mm
宽度 (Width)	600mm
床面高度 (Height)	750mm - 990mm

主要技术参数 (Main Technical Parameters)

前倾 (Reversed Trendelenburg)	$\geq 12^\circ$
后倾 (Trendelenburg)	$\geq 12^\circ$
背板上折 (Backrest adjustment)	$0^\circ \sim 60^\circ$
辅助台面尺寸 (Support set length)	
长度 (Length)	550mm
宽度 (Width)	490mm
电源 (Power)	AC220V, 50Hz
包装体积 (Volume)	158 \times 94 \times 103cm

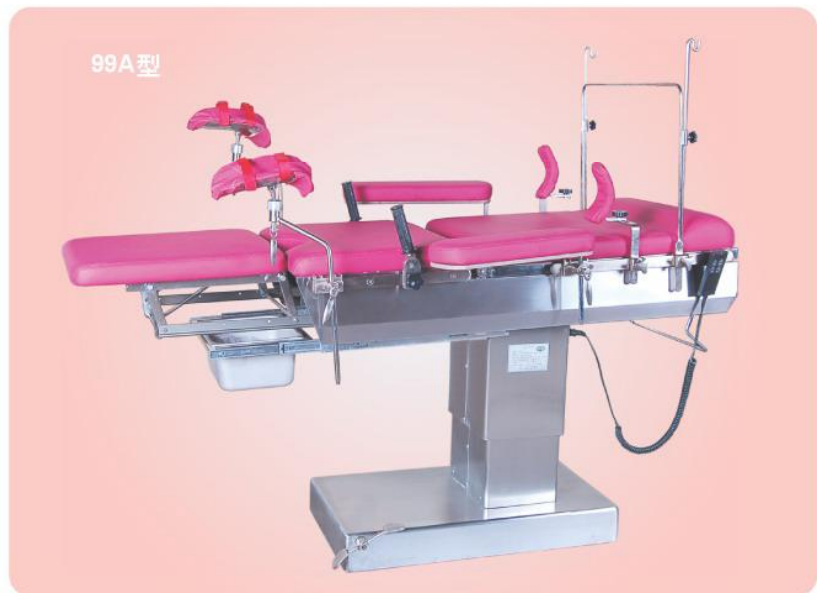

99A型

电动产床(99B型)

Electric Parturition Bed (Model 99B)



99B型电动产床是我公司根据市场需要，吸收和借鉴国外先进技术制造的，供产妇产、妇科手术、诊断及检查，具有包括紧急剖腹产在内的多种医疗功能。

99B型电动产床上下升降由微型触摸控制器操纵，使用方便、灵活，动力系统关键部分采用线性电机，噪音低、性能稳定、使用环境好。配有可拆卸式辅助台面。

所有外罩、台面板、污物盆，均为不锈钢制作，外表美观，易于清洁。

Model 99B electric obstetric tables based on the need of market are made with overseas advanced technology. They are made for gynecology and obstetrics childbirth, gynecology operation, diagnosis and examination. And also can be used in caesarean operation. The heave, slant and replication are controlled by hydrostatic micro touch so that it can be used conveniently and flexibly. The key components of the hydrostatic system are imported which is stable and not noisy. It also has knockdown accessorail operating board. The outside cover, table-board, filth bowl are all made by stainless steel. The surface has an artistic look and is easy for clearing.

主要规格 (Specifications)		主要技术参数 (Main Technical Parameters)	
长度 (Length)	1330mm	前倾 (Reversed Trendelenburg)	≥18°
宽度 (Width)	600mm	后倾 (Trendelenburg)	≥8°
床面高度 (Height)	750mm-990mm	背板上折 (Backrest adjustment)	≥60°
		背板下折 (Backrest adjustment)	≥10°
腿板为可拆卸式		电源 (Power)	AC220V, 50Hz
台面尺寸: 600×650mm		包装体积 (Volume)	152×94×105cm

电动产床(99F型)

Electric Parturition Bed (Model 99F)

99F型电动产床是根据妇产科临床检查及治疗的特殊要求而设计的一款新颖产品，适用于医院妇产科、泌尿外科各种仪器及镜类检查、诊断。床面设计呈流线形，符合患者体位，电动调节满足整体倾斜，并通过调整整体前后倾斜来调节产床的高度。床面、头枕为聚胺脂发泡成型的软垫，可轻松卸下清洗、消毒。床两侧可按客户要求加装阴道镜，床体下面安置了隐藏式的污物盆，便于处理污水及杂物。

The model 99F electrical operated obstetric table is a new product. It is designed on the base of gynecology clinical examination and the special request of treatment. It can be used for gynecology, urology surgery, mirror check and diagnosis. The bed surface is streamline and conforms to the patient body posture. The dynamoelectric adjustment satisfy whole inclination. The obstetric table altitude is adjusted by the whole inclination. The bed surface, the head pillow is made of polyurethane cushion which is easy to unlade and sterilize. The bed two sides might install the vagina mirror according to the customer request. There is hide ordure basin under the bed, it is easy to handle dirty water and sundry goods.

主要规格 (Specifications)	
长 (Length)	1200mm
宽 (Width)	600mm
台面最高 (Max Height)	1320mm
台面最低 (Min Height)	600mm
前倾 (Reversed Trendelenburg)	≥20°
后倾 (Trendelenburg)	≥25°
电源 (Power)	AC220V, 50Hz
手动控制器电压 (Manual voltage controller)	DC24V
包装体积 (Volume)	148×91×130cm

