


# -25°C Freezer

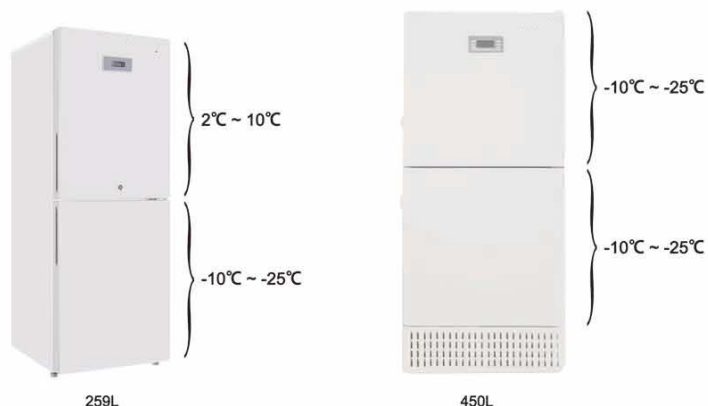

## TECHNICAL PARAMETERS

Model	BDF-25V259	BDF-25V450
External Size(W*D*H) mm	640*578*1685	655*780*1845
Capacity	Upper refrigerator: 157L Down freezer: 102L	Upper freezer: 225L Down freezer: 225L
Type	Vertical	
Temp. Range	Upper: 2°C~10°C Down: -10°C~-25°C	Upper: -10°C~-25°C Down: -10°C~-25°C
Temp. Accuracy	Refrigerator: 0.1°C, Freezer: 1°C	0.1°C
Control System	Microprocessor control	
Alarm	High or low temperature alarm, sensor failure alarm, open-door alarm	
Refrigeration Type	Direct refrigeration	
Refrigerant	R134a, CFC free	
Condenser&Evaporator	High efficiency air-cooled condenser	
Construction	Structure	Unibody design; Mono-assembly foaming(Rigid polyurethane insulation material)
	Internal Material	ABS Material
	External Material	Cold-rolled steel coated with anti-bacteria powder.
Shelf/Drawer	3 toughened glass shelves/4 drawers	6 plastic drawers/6 plastic drawers
Consumption	135W	400W
Power Supply	AC220V±10%, 50/60Hz	
Package Size(W*D*H) mm	643*712*1800	762*842*2066
Gross Weight	82kg	122kg

## TECHNICAL PARAMETERS

Model	BDF-25V268	BDF-25V270	BDF-25V328
External Size(W*D*H) mm	675*675*1580	580*600*1750	675*675*1850
Capacity	268L	270L	328L
Type	Vertical		
Temp. Range	-10°C~-25°C		
Temp. Accuracy	0.1°C	1°C	0.1°C
Control System	Microprocessor Control & LED Display (Except model BDF-25V270 is LCD display)		
Alarm	High and low temperature; System & sensor failure; Door ajar; Power failure alarm		
Refrigeration Type	Direct Refrigeration		
Refrigerant	R404a, CFC Free	R134a, CFC Free	R404a, CFC Free
Compressor	International famous compressor		
Condenser&Evaporator	High efficiency air-cooled condenser, made of copper		
Construction	Structure	Unibody Design & Mono-assembly foaming (Rigid polyurethane insulation material)	
	Internal Material	Cold-rolled steel coated with anti-bacteria powder for BDF-25V268 and BDF-25V328, ABS material for BDF-25V270	
	External Material	Cold-rolled steel coated with anti-bacteria powder	
Shelf/Drawers	4 shelves	7 drawers	4 shelves
Consumption	390W	130W	485W
Power Supply	AC220V±10%, 50/60Hz		
Package Size(W*D*H) mm	735*755*1635	694*651*1830	735*735*1900
Gross Weight	125kg	75kg	140kg