



## 头部操纵式综合手术台 (3008D型)

Multi-purpose Operating Table, Head controlled (Model 3008D)

3008D型头部操纵式综合手术台供胸外科、眼科、耳鼻喉科、妇产科和泌尿科等施行一般手术用。操作方便、灵活,是一台供临床使用理想的综合性手术设备。

3008D is one multi function operating table for Thoracal, ophthalmology,gynaecology, urinology operationect. It is a good all—round equipment for clinical use.

#### 特 点 (Character):

- ◎ 具有适用各种外科手术及检查的多功能手术台。 Suit for all surgery operating or examing .
- ◎ 采用集油泵油箱和传动机构于一体的脚踏液压泵。 It take hydraulic pump by footboard .
- ◎ 采用气缸控制台面的各个动作,操作方便、定位可靠。 It take cylinder to control each action easy to operate and localize.
- ◎ 结构紧凑合理, 造型新颖。

New configuration is more sound.

◎ 腰板为内置式,使用方便。

Built in wasit section is easy to use .

◎ 床垫均为采用新型耐酸碱,易消毒材料。

Mattress is manufactured with anti-acid and alkali material.

主要规格 (Specifications)	
长 (Length)	1990mm
宽 (Width)	480mm
台面最高 (Max Height)	≥940mm
台面最低 (Min Height)	≤700mm
升距(Adjust)	≥240mm

主要性能参数(Main Function and data)	T
SLAF LAF Illand Contine Daired from the Universal	0° ~45°
头板上折 (Head Section Lowered from the Horizontal) 可指卸 Detachable)	0° ~40°
背板上折 (Back Section Raised from the Horizontal)	0° ~70°
背板下折(Back Section Lowered from the Horizontal)	0° ~10°
腿板下折 (Leg Section Lowered from the Horizontal) (可拆卸 Detachable)	0° ~75°
前倾 (Reversed Trendelenburg)	0° ~15°
后倾 (Trendelenburg)	0° ~15°
左倾 (Left)	0° ~10°
右倾 (Right)	0" ~10"
腰板升距 (Adjust of Waist section)	≥80mm
台面额定负载重量(Load weight)	135kg
底座可移动或锁定 (Baseplate removed or locked)	
包装体积 (Volume) 171×79×93cm	n



## 头部操纵式综合手术台 (3008B, 3008C, 3008A, 3008AB型)

Multi-purpose Operating Table, Head controlled (Model 3008B, 3008C, 3008A, 3008AB)

本产品供医院手术室施行头、颈、胸腹腔、会阴及四肢等外科及妇产科、五官科、骨科等手术。采用油泵升降,手术时所需体位调整均在台面头部操纵。3008A型、3008AB型采用双层塑料台面,可在手术时进行X射线检查,腿板可外展开90°及拆卸,十分便于泌尿科手术。该产品获江苏省优质产品证书。3008B型、3008AB型底盘罩、内外罩为不锈钢。

This table is designed for surgical procedures of the head, neck, thorax and abdomen, And extremities as well as tor gynaecological, oto—rhino—laryngological and orthopaedics operations. It can be raised or lowered hydraulically by means of an oil pump. Various positions can be controlled on the head. Model 3008A and 3008AB, made of double decker plastic, X—ray examination can be avaliable during the operation. Leg section can be opened 90° and disassemble. It is most for the urological operation. It was awarded "High Quality Product" certificated by Jiangsu Province, Chassis inside & outside cover of model 3008B and 3008AB are stainless steel.

主要规格 (Specifications)	}
长 (Length)	2040mm
宽 (Width)	480mm
高 (Height)	800 - 1040mm

主要技术参数 (Main Technical Parameters)	
后倾(Trendelenburg)	≥30°
前倾(Reversed Trendelenburg)	≥50°
侧倾(Lateral Tilt)	≥20°
背板上折(Back Section Raised from the Horizontal)	≥80°
背板下折(Back Section Lowered from the Horizontal)	≥8°
头板上折(Head Section Raised from the Horizontal)	≥45°
头板下折(Head Section Lowered from the Horizontal)	≥90°
腿板下折(Leg Section Lowered from the Horizontal)	≥90°
腰板上升(Kidney Bridge Elevation)	≥120mm
包装体积 (Volume) 138×76×10	7cm





主要规格 (Specifications)	
长 (Length)	2040mm
宽 (Width)	480mm
高 (Height)	800 - 1040mm

主要技术参数(Main Technical Parameters)	
后倾(Trendelenburg)	≥30°
前倾(Reversed Trendelenburg)	≥50°
侧倾(Lateral Tilt)	≥20°
背板上折(Back Section Raised from the Horizontal)	≥80°
背板下折(Back Section Lowered from the Horizontal)	≥8°

头板上折(Head Section Raised from the Horizontal)	≥45°
头板下折(Head Section Lowered from the Horizontal)	≥90°
腿板下折(Leg Section Lowered from the Horizontal)	≥90°
腿板外展(Leg Section Opened)	≥90°
腰板上升(Kidney Bridge Elevation)	≥120mm
包装体积 (Volume) 141×76×114cm	n

# 头部操纵式综合手术台 (2001型)

Multi – purpose Operating Table, Head controlled (Model 2001)



主要规格 (Specifications)	
长 (Length)	2040mm
宽(Width)	480mm
高 (Height)	750 — 950mm

主要技术参数(Main Technical Parameters)	
后倾(Trendelenburg)	≥15°
前倾(Reversed Trendelenburg)	≥30°
侧倾(Lateral Tilt)	≥20°
头板上折(Head Section Raised from the Horizontal)	≥45°
头板下折(Head Section Lowered from the Horizontal)	≥90°
背板上折(Back Section Raised from the Horizontal)	≥75°
背板下折(Back Section Lowered from the Horizontal)	≥8°
座板上折(Sead Section Raised from the Horizontal)	≥20°
腰板上升(Kidney Bridge Elevation)	≥80mm
腿板下折(Leg Section Lowered from the Horizontal)	≥90°
腿板外展(Leg Section Opened)	≥50°
包装体积 (Volume) 141×76×1	07cm



## 侧面操纵式综合手术台(3001E型)

Multi-purpose Operating table, Side - controlled (Model 3001E)

本产品供医院手术室施行头、颈、胸腹腔、会阴及四肢等外科及妇产科、五官科、骨科等手术,台面升降、前后倾、左右倾由液压系统完成,背板升降应用高压气体阻尼缸支撑结构,该床整个操作系统灵活、简便。全密封底座,造型美观大方,防尘防水,稳定实用,底座造型便于医师靠近患者,减少工作疲劳。台面板采用高强度合成板制成,能透过X射线,便于透视、摄影。

This table is designed for surgical procedures of the head, neck, thorax and abdomen, and extremities as well as for department of obstetrics and gynecology, five sense organs, orthopaedics and so on operations. The table board movements, the front and back lean and the left and right lean are carry on hydraulically by the mean of oil pump, the backboard is raised and lowered by the high pressure gas cylinder. It is easy to operate. It have the airproof pedestal, beautiful shape, waterproof and dustproof function, and it is stable and practical, the pedestal mode is easy for physicians to close to sufferer and reduce fatigue. The table panel is made of high—strength synthetic panels, can through the X-ray, the perspective and photography is easy.

长 (Length)	2100mm
宽(Width)	500mm
高 (Height)	700 — 1000mm
行程(Adjust)	≥300mm

主要技术参数(Main Technical	Parameters)
前倾(Reversed Trendelenburg)	≥20°
后倾(Trendelenburg)	≥15°
侧倾(Lateral Tilt)	≥15°

头板上折(Head Section Raised from the Horizontal)	≥45°
头板下折(Head Section Lowered from the Horizontal)	≥90°
背板上折(Back Section Raised from the Horizontal)	
背板下折(Back Section Lowered from the Horizontal)	≥30°
腿板下折(Leg Section Lowered from the Horizontal)	≥90°
腿板外展(Eversion of Leg Section)	≥90°
腰板上升(Kidney Bridge Elevation)(可选配)	≥120mm
包装体积 (Volume) 145×78×98cm	







## 侧面操纵式综合手术台(3002型)

Multi-purpose Operating table, Side - controlled (Model 3002)

本产品供医院手术室施行头、颈、胸腹腔、会阴及四肢等外科及妇产科、五官科、骨科等手术。台面可上下升降及前后、左右倾,腿板既可折转、外展又可拆卸,调节方便,十分便利泌尿科手术;台面可作前后移动,且全部采用高强度有机玻璃制成,可进行X射线诊查。采用油泵液压升降,手术时所需体位调整均在台面两侧操纵。油泵内外罩及底座罩为不锈钢。

This table is suitable for surgical procedures of the head <code>,neck</code>, thorax, abdomen, perineum and extremities as well as for gynaecological, oto—rhino—laryngological and orthopaedics operation. The table's elevation, lowering, reversed trendelenburg, trendelenburg, lateral tilt can be all automatically controlled. Leg section can be rotated, opened, disassembled and adjusted easily. It is most suitable for the urological operation. The table top made of high strength glass, can move backwards and forwards. X—Ray examination can be carried out on it. It can be raised or lowered hydraulically by means of an oil pump, Various positions can be controlled from both sides. Chassis inside and outside covers are stainless steel.

主要规格 (Specification:	s)	
床面长度(Length)	2100mm	
床面宽度(Width)	480mm	
床面最高(Max Height)	1040mm	
床面最低(Min Height)	800mm	
升距(Adjust)	≥240mm 可自由升降、锁定	

主要技术参数(Main Technical	Parameters)	头板下折 (Folds Downward of Head Section )	≥90°
前倾 (Reversed Trendelenburg)	≥20°	腿板下折 (Folds Downward of Leg Section)	≥90°
后倾 (Trendelenburg)	≥20°	腿板外展 (Eversion of Leg Section)	≥90°
侧倾 (Lateral Tilt)	≥18°	台面前后移动 (Backward and Forward Movement	≥400mm
背板上折 (Folds Upward of Back Section)	≥50°	腰板上升 (Kidney Bridge Elevation)	≥120mm
头板上折 (Folds Upward of Head Section)	≥45°	包装体积 (Volume) 138×76×10	7cm





## 侧面操纵式综合手术台(3001A型, 3001B型, 3001C型, 3001D型)


Multi-purpose Operating table, Side - controlled (Model 3001A, 3001B, 3001C, 3001D)

本产品供医院手术室施行头、颈、胸腹腔、会阴及四肢等外科及妇产科、五官科、骨科等手术。采用油泵液压升降,手术时所需体位调整均在台面两侧操纵。该产品在全国同类产品质量考核评比中获第一名,获国家医药管理局优质产品证书。3001B型、3001C型底盘罩及内外罩为不锈钢。

This table is suitable for surgical procedures of the head, neck, thorax, abdomen, perineum and extremities as well as for gynaecological,oto—rhino—laryngological and orthopaedics operation. It can be raised or lowered hydraulically by means of an oil pump. Various positions can be controlled from both side. It has been awarded the first prize in China. It has won the "High Quality Product" certificate of the State Pharmacen—tical Administration Department. Chassis inside & outside cover of model 3001B and model 3001C are stainless steel.





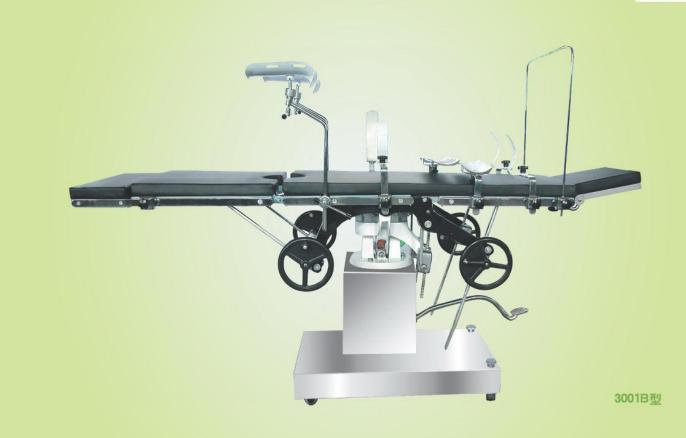

主要规格(Specificatio	ns)
★ (Length)	2100mm
宽 (Width)	480mm
高 (Height)	800 - 1040mm
高 (Height)	710-910mm (3001D型)

主要技术参数(Main Technical Pa	rameters)	
后倾(Trendelenburg)		≥20°
前倾(Reversed Trendelenburg)		
侧倾(Lateral Tilt)		
头板上折(Head Section Raised from the Horizontal)		
头板下折(Head Section Lowered from the Horizontal)		≥90°
背板上折(Back Section Raised from the Horizontal)		≥75°
背板下折(Back Section Lowered from the Horizontal)		≥18°
腿板下折(Leg Section Lowered from the Horizontal)		≥90°
腿板外展(Leg section Opened)	≥90° (3001	D型)
腰板上升(Kidney Bridge Elevation)		≥120mm
包装体积 (Volume)	138 × 76 × 107	7cm

